




PV16-445AG-M10

- Simple roof integration with clean, low-profile aesthetic for new build and retrofit
- Rapid installation times of less than 45 min/kWp easily achieved
- Compatible with the widest range of slate and tile including special fixings for different batten thickness
- Fitted during the normal roofing programme, enabling clarity of responsibility and safe working practices
- Achieves highest fire rating and wind resistance without modifications to the roof

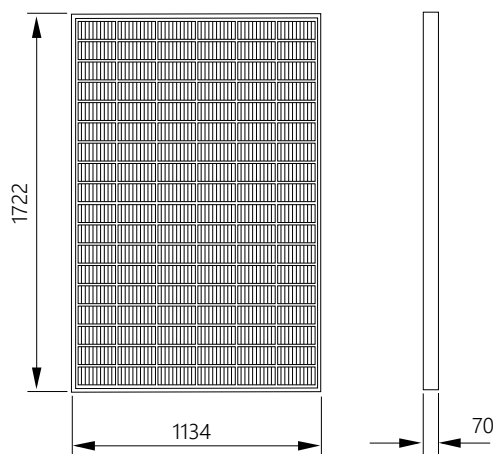

PV16-445AG-M10




Mechanical Specification

Model		PV16-445AG-M10
Aperture Area	m ²	1.885
Width	mm	1,134
Length	mm	1,722
Thickness	mm	70
Weight	kg	28.3
Static roof loading (distributed)	kg / m ²	14.5
Characteristic Wind Resistance	kPa	4.65
Ultimate Design Load ¹	kPa	4.65
Positive Design Load	IEC 61215	5.40
Roofing System Fire Rating	EN 13501-5	B _{ROOF} (T1, T4)
Power Warranty	% rated	95% 10 years, 87% 30 years
Product Warranty		15 years
Standards		IEC61215, 61730, TUV, MCS05, MCS12
Structural Durability		Equivalent to roof structure

Electrical Specification

Model		PV16-445AG-M10
Peak Power ²	Wp	445
Module Efficiency ³	%	23.6
Number of Cells		54x2
Maximum Power Voltage (V _{mpp})	V	33.02
Maximum Power Current (I _{mpp})	A	13.48
Open Circuit Voltage (V _{oc})	V	39.90
Short Circuit Current (I _{sc})	A	14.18
NOCT ⁴	°C	42.0
Cell Type		N-Type TOPCon
Power Temperature Coefficient	% / °C	-0.29
Current Temperature Coefficient	% / °C	0.04
Voltage Temperature Coefficient	% / °C	-0.25
Maximum System Voltage	VDC	1,000
Maximum Fuse Rating	A	30
Safety Classification		Class 2
Electrical Connectors		Genuine Stäubli MC4 PV-KST4, PV-KBT4

I-V Curve

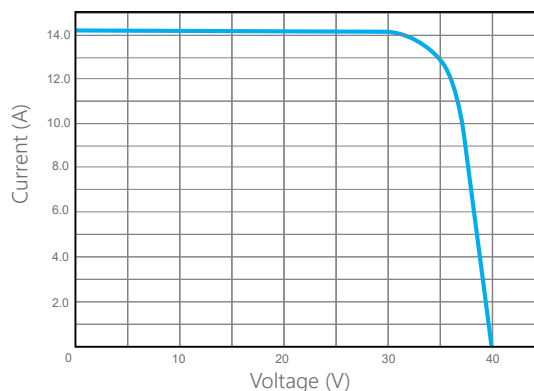

¹ Design resistance to ultimate loads includes a partial material safety factor of 1.0

² Subject to a manufacturing tolerance of +/- 5 %.

³ Based on aperture area.

⁴ Nominal Operating Cell Temperature






Electrical specification measured under standard test conditions: Irradiation 1 kW/m² with light spectrum AM 1.5 and a cell temperature of 25°C.

AG-M10 Solar Photovoltaic Panels


Pitched Roof Integration

Sleek, low-profile integrated solar that replaces the roof covering for an improved aesthetic and for simple roof maintenance, now at similar cost to above-roof panels. Simple, beautiful, durable.

Solar never looked so good.

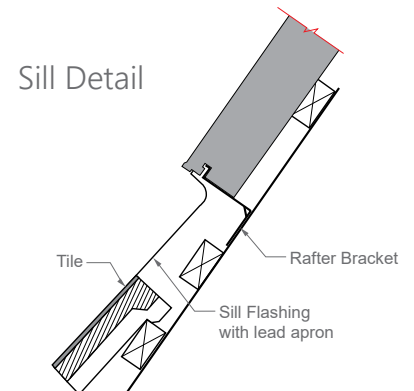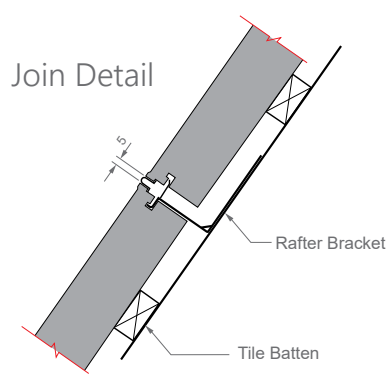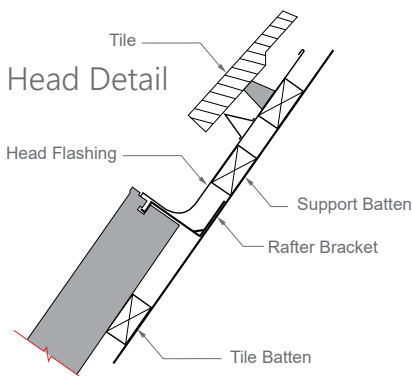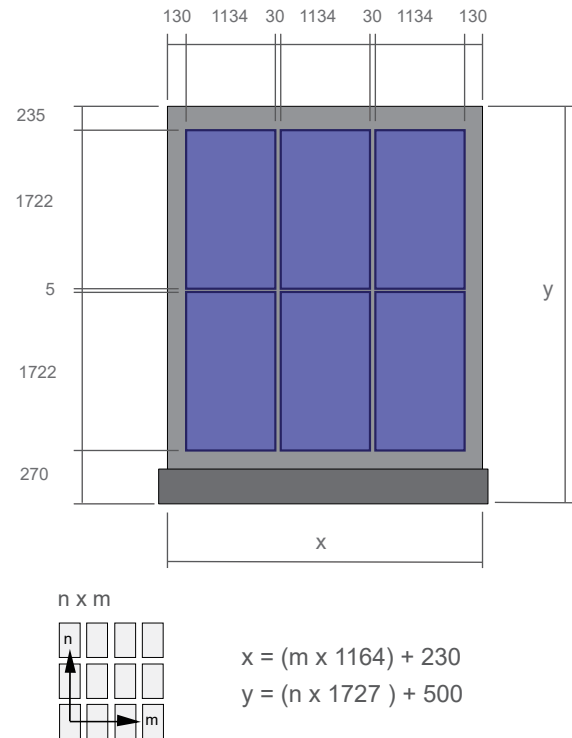

Side Detail



Gutter Detail
(joined flashings)